

# Development of wind-aware piloting interfaces and dynamic quadrotor simulator with spatiotemporally-varying wind


Max DeSantis, Asma Tabassum

Controls, Robotics, and Automation Lab, Oklahoma State University

## Introduction

As interest in low-altitude urban flight increases, there exists a need for high quality environmental feedback for pilots operating in dense environments [1]. Currently, pilots can rely only on natural perception, weather forecasting, and measurements from weather stations. Furthermore, there are no open-source human-in-the-loop (HIL) simulators allowing spatiotemporal wind. Our goals are two-fold:

- Develop piloting interfaces that succinctly relay wind conditions in familiar manners
- Create a dynamic simulator supporting 3D wind velocities varying in both place and time

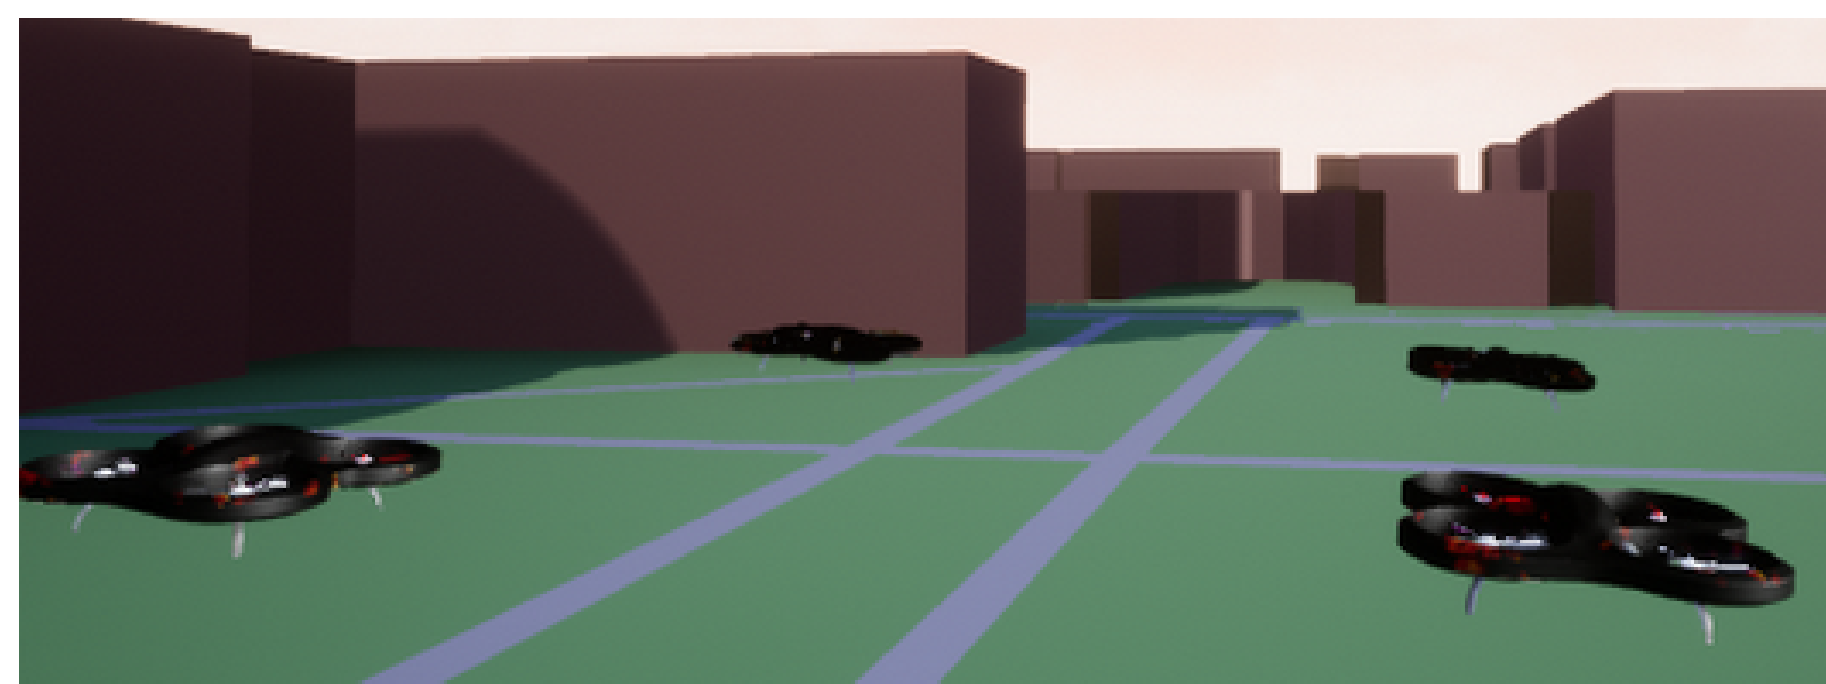

1: Drones under varying winds in low-fidelity environment

## Method

### Piloting Interfaces

- Modify PX4 autopilot's Mavlink system to transmit estimated wind velocities
- Expand QGroundControl (QGC), an open-source ground control station, to display estimated wind velocities
- Develop wind-aware trajectory recommendation and preview system


### Wind-Aware Simulator

- Use Microsoft AirSim simulator as basis
- Adapt existing work in spatiotemporal wind simulation [2]
- Introduce critical optimizations allowing for real-time simulation and HIL usage

## Interface Results

### Wind Velocity Display


- Planar and vertical velocities separated
- Planar direction on compass, aircraft heading included for comparison
- Speeds shown on gradients, allowing quick reference
- Numerical magnitudes available alongside graphical indicator

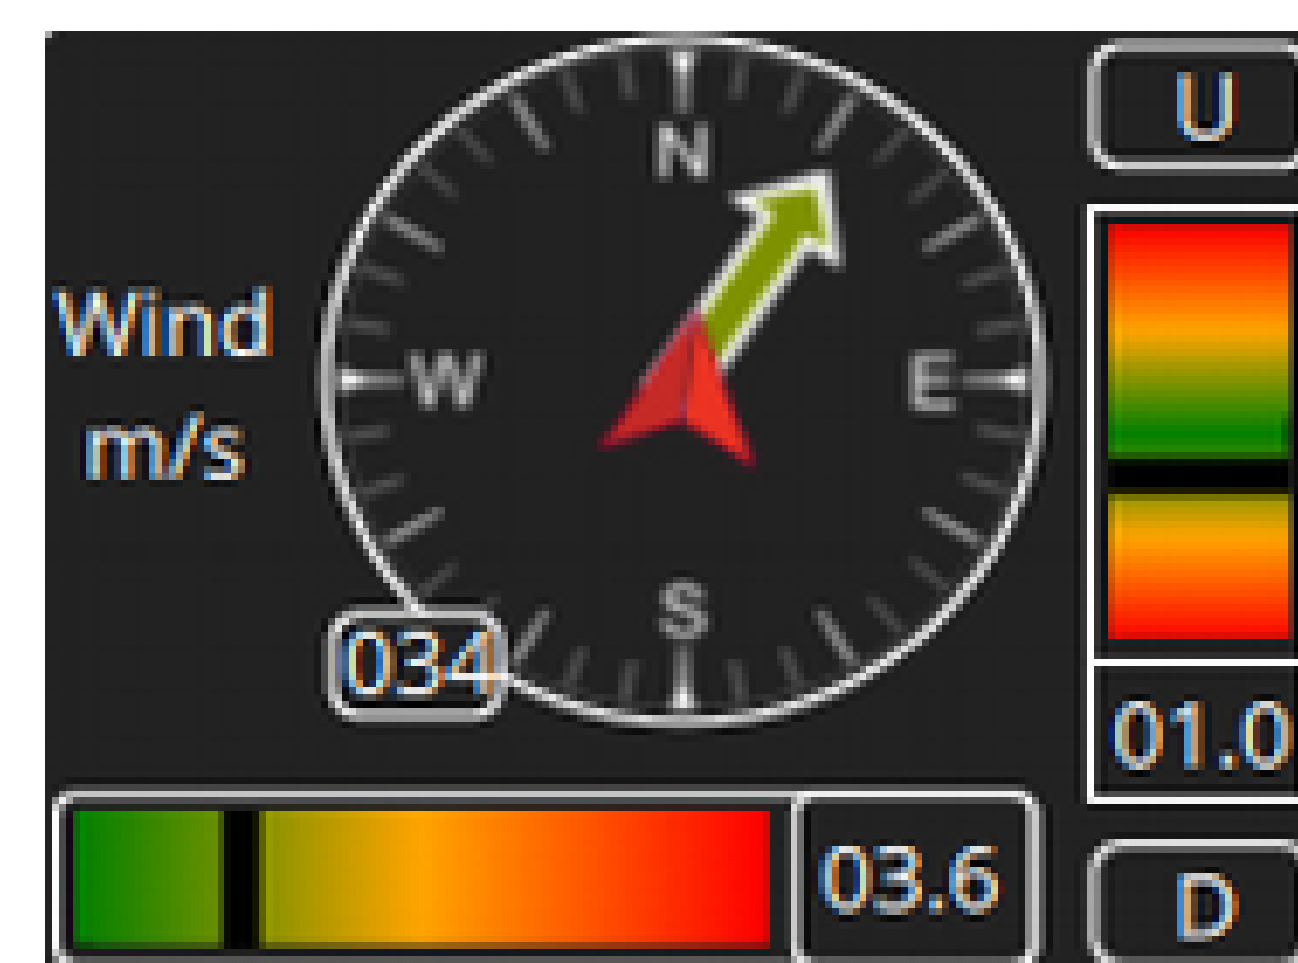


2: Wind display with simulated velocity

### Trajectory Recommendation

- Recommendation and update implemented; *placeholder algorithm generates trajectory*
- Pilot previews new route, can accept or deny changes
- Modify new route afterwards if desired

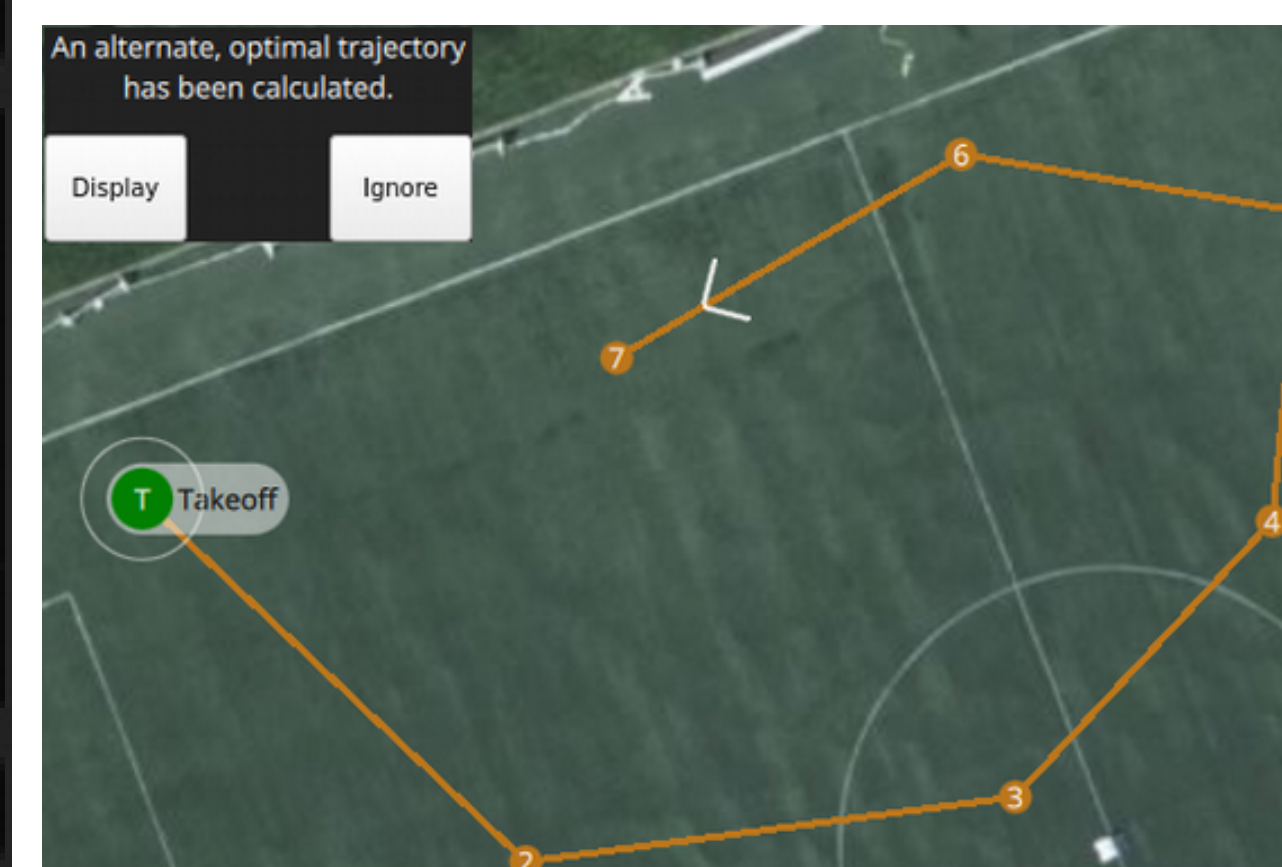


3: Pilot-generated trajectory

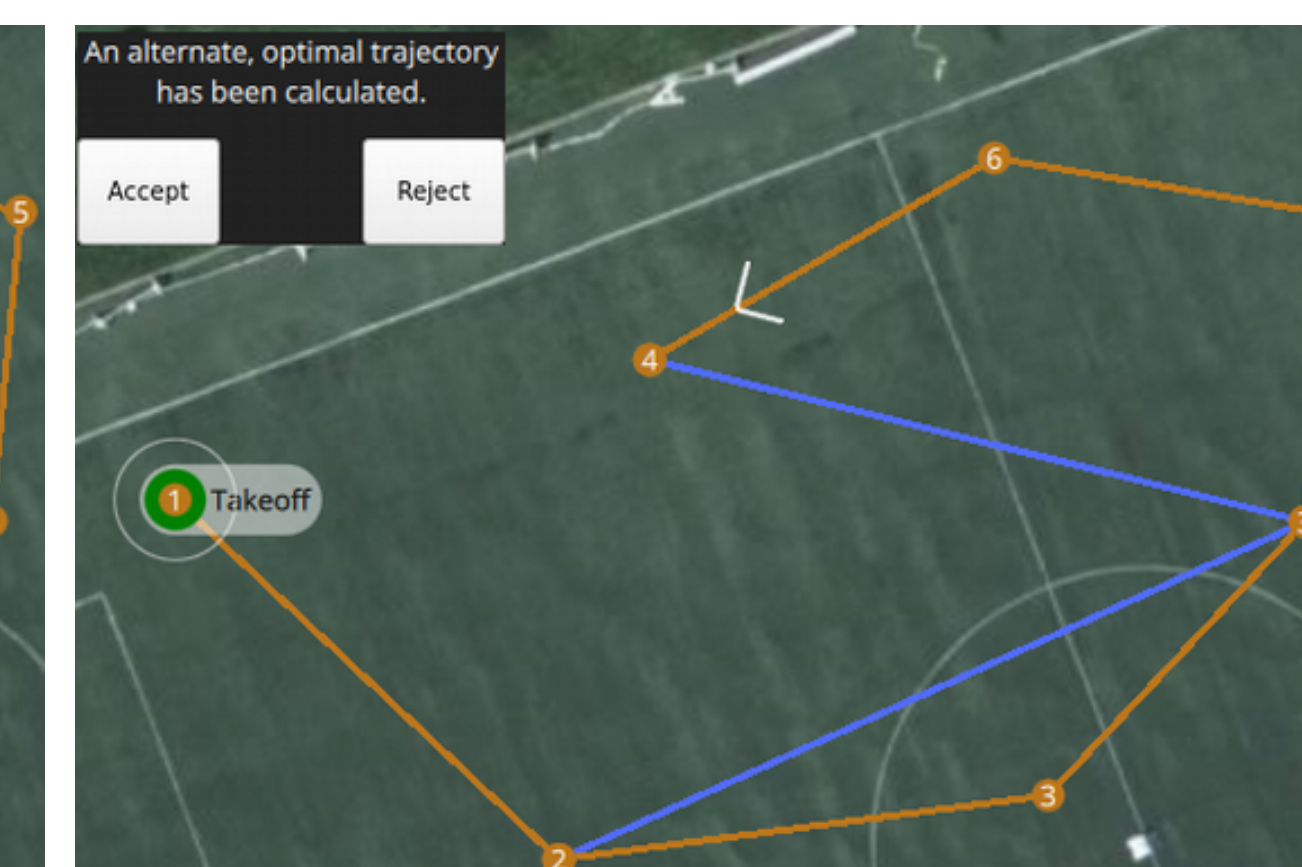

4: Recommended trajectory

## Simulator Results

- Fluid simulation data provided by user in settings
- Local winds calculated directly from position; *high performance with minimal overhead*
- Parallel thread prepares upcoming data without impacting simulation
- Minimal changes to existing physics engine, previous functionality remains present

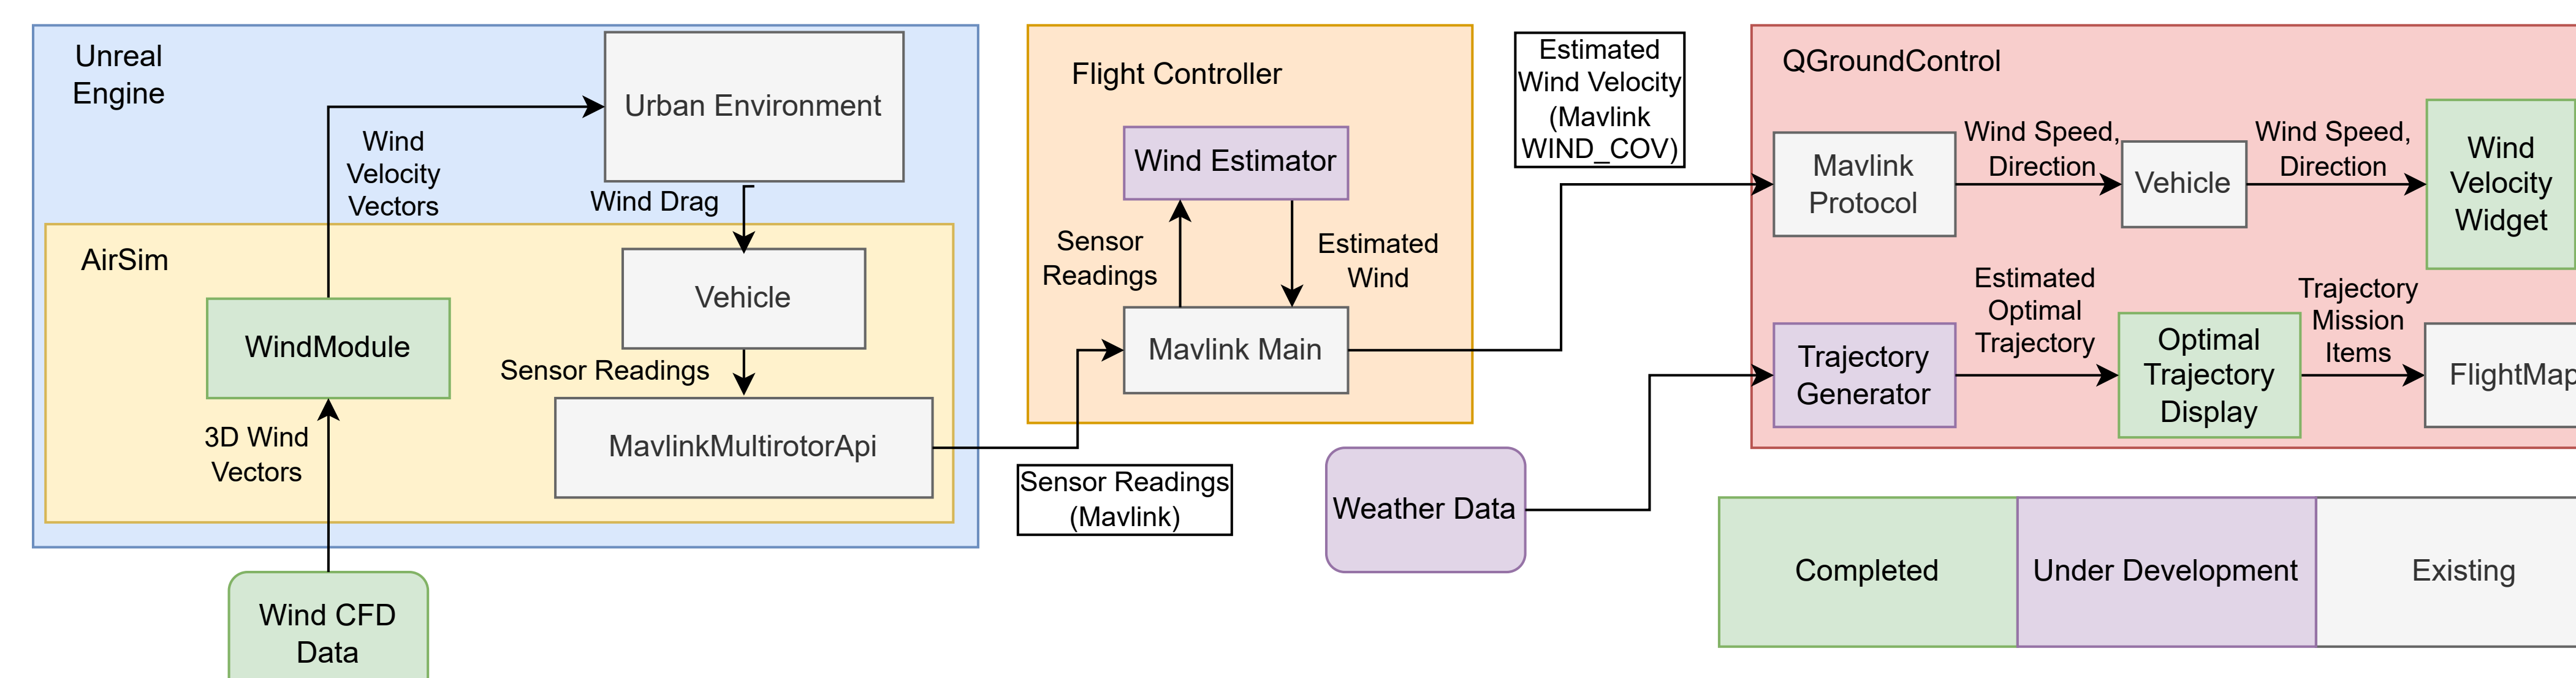

5: AirSim, Flight Controller, and QGC Information Flow

## Conclusion

- Support for real-time drone simulations with spatiotemporally-varying wind
- Created prototype display for estimated local wind velocity
- Developed trajectory recommendation system

## Future Work

- Quiver-plot style wind overlay in QGC
- Integrate optimal trajectory generation
- Display details for multiple simulated drones
- Create OSU campus simulation environment
- Test displays on physical drone

## References

- [1] Colleen Reiche, Adam P. Cohen, and Chris Fernando. An Initial Assessment of the Potential Weather Barriers of Urban Air Mobility. *IEEE Transactions on Intelligent Transportation Systems*, 22(9):6018–6027, September 2021.
- [2] Fadri Furrer, Michael Burri, Markus Achtelik, and Roland Siegwart. *Robot Operating System (ROS): The Complete Reference (Volume 1)*, chapter RotorS—A Modular Gazebo MAV Simulator Framework, pages 595–625. Springer International Publishing, Cham, 2016.

## Acknowledgements

This work is partially supported by the National Science Foundation (NSF) under Grant No. 1925147.

## Contact

- max.desantis@okstate.edu
- asma.tabassum@okstate.edu