



## Production Technology

### Oklahoma State University



---

PT 2003-6

March 2003

Vol. 15 No. 6

---

### A Sweatless Soil Sampler

Mike Kress, Brian Arnall and Hailin Zhang  
Department of Plant and Soil Sciences

---

Soil testing is an important tool for crop nutrient management. It gives you a good estimate of how much fertilizer to apply. However, soil testing requires soil sampling, and that can be very hard, especially when the soil is dry or rocky.

The Sweatless Soil Sampler (SSS, shown in Figure 1) reduces the amount of work and time needed to take a soil core. This makes it easier to take more cores per sample and gives you a composite sample that better represents your field. The SSS also makes it easier to mix your soil plugs in the bucket since they are already broken into small pieces.



Figure 1. The sweatless soil sampler developed by the Soil, Water and Forage Analytical Laboratory at Oklahoma State University.


When compared to a conventional soil probe the SSS has many advantages. The SSS works very well in hard compacted soils such as pastures and lawns, where it is difficult to take a sample with a conventional soil probe when the soil is dry. The SSS also works well in sandy soils where the conventional soil probe has difficulty retrieving the soil core. Another advantage to using the SSS is that unlike the tip of conventional soil probes the bit will not quickly dull.

The SSS is easy to make and parts are relatively inexpensive to purchase. The sampler was designed so that anyone would be able to purchase parts from most local hardware stores and assemble the sampler at home. It is also suggested that operators

make any modifications to the sampler. This allows for the sampler to be used in many different situations.


### Parts:

1. Long Ship Auger  $\frac{3}{4}$ " dia, 17-18" length
2. 12-16" Hole Saw Extension
3. Bucket
4. 1  $\frac{1}{2}$ " length  $\frac{3}{4}$ " dia PVC schedule 40 pipe
5.  $\frac{3}{4}$ " male threaded adapter
6. Conduit nut (metal)

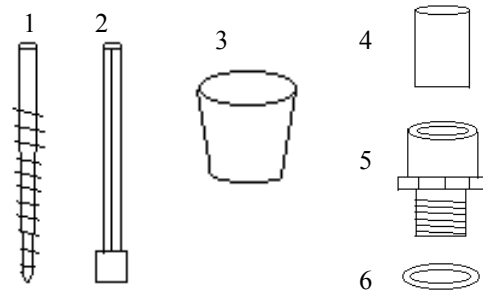

### Procedures:

1. Cut hole in bucket(3) to fit threaded end of threaded PVC coupler
2. Glue PVC pipe(4) into threaded PVC coupler(5)
3. Insert threaded end of coupler(5) into hole and secure to bucket with conduit nut(6).
4. To put the extension and auger together it may be necessary to grind down the end of the auger.
5. To put the extension and drill together it may be necessary to grind down the end of the extension.

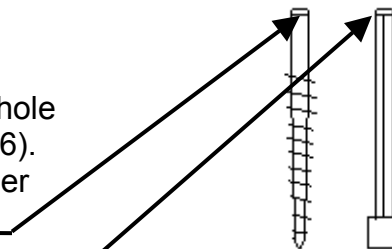

For more information, please contact Mr. Michael Kress at 405-744-9566 or [mwk@mail.pss.okstate.edu](mailto:mwk@mail.pss.okstate.edu).



Oklahoma State University, in compliance with Title VI and VII of the Civil Rights Act of 1964, Executive Order 11246 as amended, Title IX of the Education Amendments of 1972, Americans with Disabilities Act of 1990, and other federal laws and regulations, does not discriminate on the basis of race, color, national origin, sex, age, religion, disability or status as a veteran in any of its policies, practices or procedures. This includes but is not limited to admissions, employment, financial aid, and educational services.

Issued in furtherance of Cooperative Extension work, acts of May 8 and June 30, 1913, in cooperation with the US Department of Agriculture, Sam E. Curl, Director of Oklahoma Cooperative Extension Service, Oklahoma State University, Stillwater, Oklahoma. This publication is printed and issued by Oklahoma State University as authorized by the Dean of the Division of Agricultural Sciences and Natural Resources.